




SAE AS22759/32 & 33

Cross-Linked ETFE - 600V, 150/200°C

APPLICATION

These lightweight, high temperature airframe and avionics wires utilize an insulation of cross-linked, modified ethylene tetrafluoroethylene copolymer (ETFE). The insulation resists high PH cleaning fluids, fuels, lubricating oils, and many other chemicals. These wires can withstand temperature test extremes ranging from cold bend at -65°C through aging at 300°C for 7 hours. These wires are a mechanically tough, flame retardant, and weight saving solution to many aerospace applications.

Lightweight Wall

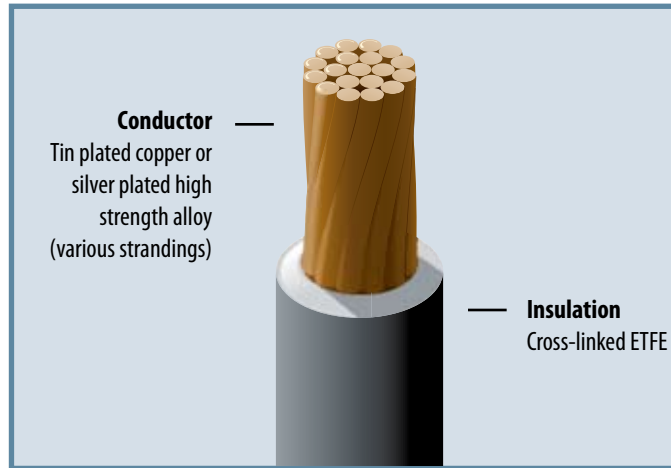

Conductor
Tin plated copper or silver plated high strength alloy (various strandings)

Insulation
Cross-linked ETFE

CONDUCTOR

Soft annealed tin plated copper for /32 and silver plated high strength copper alloy for /33, stranded as listed below.

INSULATION

Single layer irradiation cross-linked extruded ETFE meeting the requirements of the below specification.

Part Number	Conductor			Conductor Resistance @20°C	Nom. Diameter		Weight			
	Size		Stranding		Material	Inch	mm	lbs/kft	kg/km	
	AWG	mm ²								
22759/32-28-X	28	.09	7/36	TC	68.6	225	.027	.68	.91	1.35
22759/32-26-X	26	.15	19/38		41.3	136	.032	.81	1.4	2.08
22759/32-24-X	24	.24	19/36		26.2	86.0	.037	.94	2.0	2.98
22759/32-22-X	22	.38	19/34		16.2	53.2	.043	1.09	2.8	4.17
22759/32-20-X	20	.62	19/32		9.88	32.4	.050	1.27	4.3	6.40
22759/32-18-X	18	.96	19/30		6.23	20.4	.060	1.52	6.5	9.67
22759/32-16-X	16	1.23	19/29		4.81	15.8	.068	1.73	8.3	12.3
22759/32-14-X	14	1.94	19/27		3.06	10.0	.085	2.16	13.0	19.0
22759/32-12-X	12	3.08	37/28		2.02	6.63	.103	2.62	19.7	29.0
22759/33-28-X	28	.09	7/36		SA	74.4	244	.027	.68	.91
22759/33-26-X	26	.15	19/38	44.8		147	0.32	.81	1.4	2.08
22759/33-24-X	24	.24	19/36	28.4		93.2	.037	.94	2.0	2.98
22759/33-22-X	22	.38	19/34	17.5		57.4	.043	1.09	2.9	4.31
22759/33-20-X	20	.62	19/32	10.7		35.1	.050	1.27	4.4	6.55

X = color. See page 67 for color designator.

The above part numbers represent the more popular constructions. However, other designs are available upon request.

All products are manufactured to meet RoHS compliance. For exceptions, please contact our sales department.

APPROVALS AND RATINGS

150°C conductor temperature, 600 volt, SAE AS22759/32.
200°C conductor temperature, 600 volt, SAE AS22759/33.

CABLES

Cables may be assembled using the requirements of NEMA WC 27500 using Type SB and Type SC components for /32 and /33 respectively.

