

## AS85049/91,92 Series

### Cable clamp strain relief - Composite straight and 90°

**For connectors:**


- MIL-DTL-38999 Series III & IV
- EN3645

### Ordering information

<b>Basic Series</b>	M85049/	91	-	15	M
<b>Angle</b> 91: Straight 92: 90°					
<b>Self-locking option</b> - : Self locking detented					
<b>Shell size</b> 09, 11, 13, 15, 16, 17, 19, 21, 23, 25					
<b>Material and plating</b> J: Composite (conductive), olive drab cadmium over electroless nickel M: Composite (conductive), electroless nickel T: Composite (non-conductive) without plating					



### Dimensions

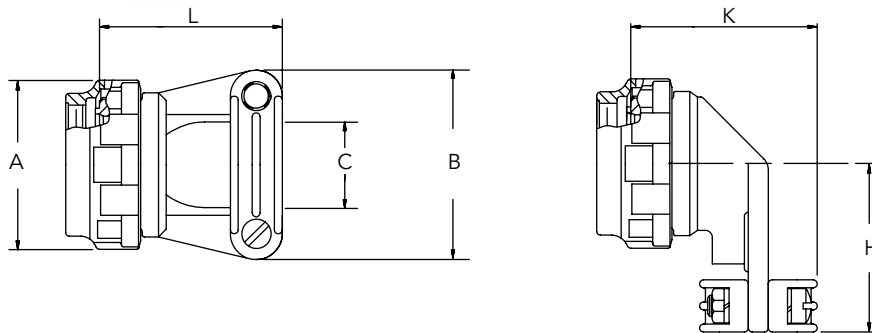

Shell size	Ø A maxi		B maxi		C <sup>±0.031"</sup> ±0.78mm		H <sup>±.062"</sup> ±1.6mm		K maxi	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
09	0.858	21.79	0.98	24.89	0.219	5.56	0.875	22.2	1.06	26.92
11	0.984	24.99	1.05	26.67	0.264	6.71	0.937	23.8	1.10	27.94
13	1.157	29.39	1.20	30.48	0.344	8.74	1.031	26.2	1.18	29.97
15	1.280	33.51	1.30	33.02	0.460	11.68	1.125	28.6	1.30	33.02
17	1.406	35.71	1.42	36.07	0.545	13.84	1.312	33.3	1.38	35.05
19	1.516	38.51	1.52	38.61	0.615	15.62	1.375	34.9	1.45	36.83
21	1.642	41.51	1.64	41.66	0.698	17.73	1.500	38.1	1.54	39.12
23	1.768	44.91	1.77	44.96	0.780	19.81	1.625	41.3	1.62	41.15
25	1.890	48.01	1.89	48.01	0.850	21.59	1.750	44.5	1.69	42.93

Note: All dimensions are in inches and millimeters (inch/mm). For complete dimensions, see the applicable Military Specification. Cable entry is defined as the envelope area of the cable or wire bundle. It is not intended for inspection criteria.